

TDC Micro Brushless DC Pump



Typical Applications

- Rack Server
- High Density Server
- GPU Server
- High Frequency Server

Features

- 50,000 hours long working life
- Ultra efficient, low power consumption
- No leakage, more reliable
- Continuous duty
- Variable speed
- Super quiet

Specification


Model	Product Code	Rated Voltage (VDC)	Max Water Flow (L/min)	Max Water Head (M)	Rated Current (A)	Rated Power (W)
TDC	TDC-A12-0805	12	8	5	1.42	17.04
	TDC-B12-0805	12	8	5	1.42	17.04

Standard configuration: 1. /PWM or /5V speed control 2. FG (RPM) signal wire 3. LHE-4PConnector

- The data in the table is the measured performance when pure water is delivered at normal temperature.
- The maximum flow rate is the flow rate when water head is 0 meter, and the highest lift is the lift when water flow is 0 L/min.
- Working mode: Continuous operation under 50°C liquid temperature
- IP level: IP54

- Coil Insulation class: Class F
- Ambient temperature: -40°C ~40°C
- Liquid temperature: -40°C ~50°C (continuous)
- Do Not Run Pumps Dry.
- Pumps must be in a continuous flooded suction environment.

Curve

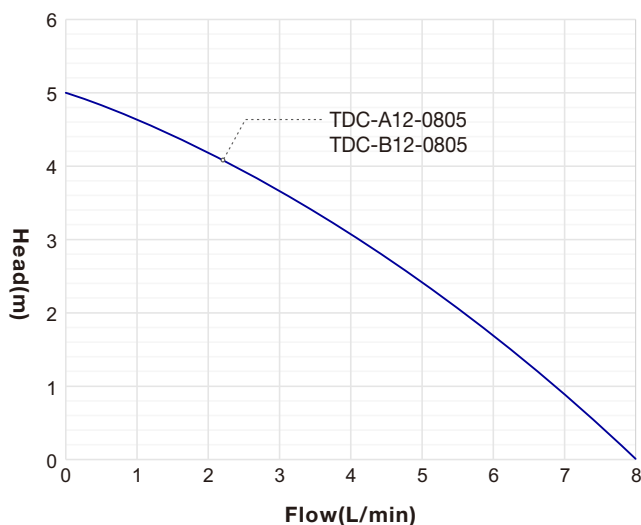

Dimension

