TL-B10

Micro DC Brushless Pump

Pump A

Pump B

Pump C

Typical Applications

- Water Dispenser, Water Cooler
- Truck AC System
- 3D Laser Printer Cooling
- Air-conditioner Drain
- Beverage Dispenser
- Chillers, Cooling Circulation
- Battery Cooling System
- Home Appliance

Specification

Model	Product Code	Max Flow Rate (L/Min)	Max Water Head (M)	Voltage (VDC)	Current (A)	Power (W)
TL-B10-A	TL-B10-A12-0703	7	3	12	0.6	7
	TL-B10-A12-0905	9	5	12	1.4	16.8
	TL-B10-A24-0703	7	3	24	0.35	10
	TL-B10-A24-0905	9	5	24	0.55	15
	TL-B10-A24-1208	12	8	24	1.3	31.2
TL-B10-B	TL-B10-B12-0703	7	3	12	0.6	7
	TL-B10-B12-0905	9	5	12	1.4	16.8
	TL-B10-B24-0703	7	3	24	0.35	10
	TL-B10-B24-0905	9	5	24	0.55	15
	TL-B10-B24-1208	12	8	24	1.3	31.2
TL-B10-C	TL-B10-C12-0905	9	5	12	1.38	16.8
	TL-B10-C24-0905	9	5	24	0.65	15

Customization: 1. /H High temperature, liquid ≤100℃ 2. /S Submersible, liquid ≤50℃ 3. /FG (RPM) signal wire 4. /PV Powered by solar panel directly 5. /PWM or /5V speed control

Curve

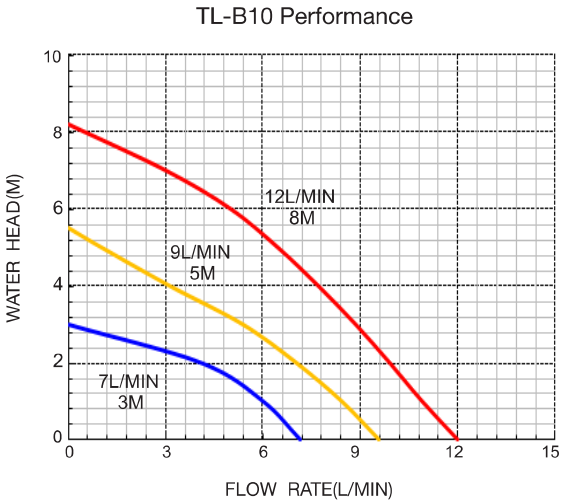

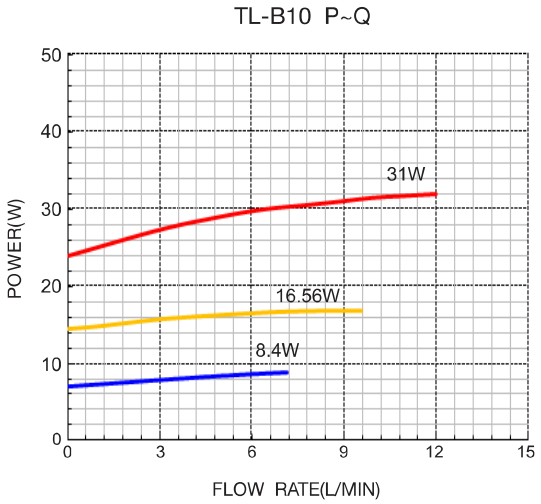

Dimension (mm)

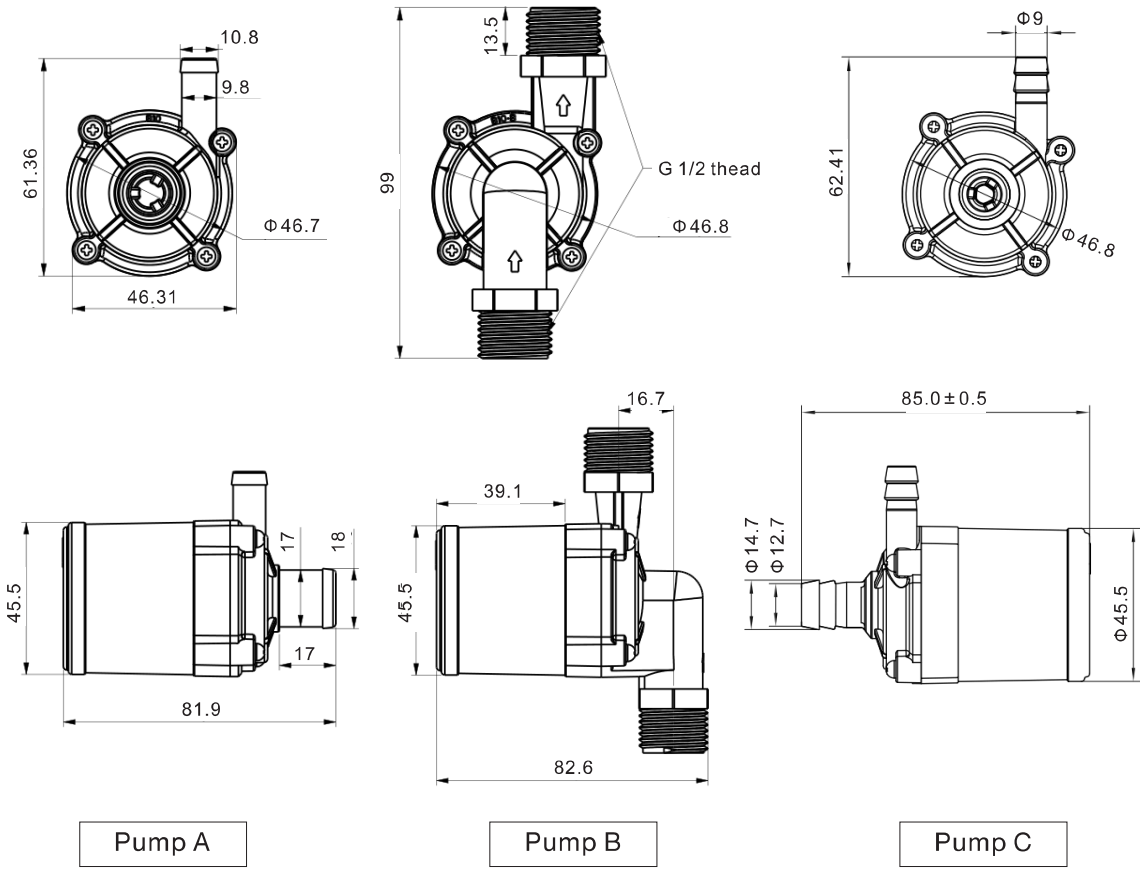

Pump A | Pump B | Pump C